



data sheet



BENEFITS

Best-in-class mid-range performance at lowest cost

Unprecedented price/performance with extended range at the industry's most affordable price point

Extended range requires fewer APs

Adaptive antenna technology delivers up to a 2x increase in Wi-Fi signal coverage minimizing the number of APs required to service any area

Sleek, low profile enclosure for ease-of-deployment

Aesthetically-pleasing design fits almost anywhere

Channel selection optimizes throughput

ChannelFly dynamic management, based on throughput measurements, not just interference, chooses the best channel to give users the highest throughput

Super simple configuration and management

The industry's simplest configuration and management through a Web-based wizard and automated deployment capabilities

Flexible deployment options

Standalone or controller-based deployment

Smart wireless meshing

When used with a ZoneDirector Smart WLAN controller, the ZoneFlex 7372 easily extends Wi-Fi services to areas where Ethernet cabling isn't available, possible or cost effective

Adaptive Polarization Diversity (PD-MRC)

Dual-polarized antennas that are dynamically selected provide better reception for hard to hear clients and more consistent performance as clients constantly change orientation

Hassle free migration to higher speed Wi-Fi

Support for standard 802.3af power over Ethernet allows enterprises to use existing PoE switches without costly upgrades

ZoneFlex™ 7372

DUAL-BAND 802.11N SMART WI-FI ACCESS POINTS

High Performance, 802.11n Mid-Range Smart Wi-Fi Access Points with Adaptive Antenna Technology

The Ruckus ZoneFlex 7372 delivers high-performance and reliable 802.11n wireless networking at the industry's most affordable price point.

Unlike any other 802.11n wireless solution in its class, the ZoneFlex 7372 combines patented adaptive antenna technology and automatic interference mitigation to deliver consistent, predictable performance at extended ranges with up to an additional 4dB of BeamFlex gain on top of the physical antenna gain and up to 10dB of interference mitigation.

Additional performance enhancements to signal gain can be attributed to the chip-based transmit beamforming capability adding 4 dB when associated to a compatible client. The 7372 is also ideal for client performance with mobile devices that constantly change orientation with dual-polarized antennas that adapt to hand-held device movement.

Each ZoneFlex 7372 integrates Ruckus-patented BeamFlex, a software-controlled, high gain antenna array that continually forms and directs each 802.11n packet over the best performing signal path. The ZoneFlex 7372 automatically selects channels for highest throughput potential using Ruckus ChannelFly dynamic channel management, adapting to environmental changes. Once deployed, enterprises never have to worry about constant site surveys as the environment changes.

A sleek and low-profile design, the ZoneFlex 7372 was purpose-built for cost-minded enterprises requiring reliable high speed client connectivity. It is ideal for a variety of enterprise and hotspot environments including hotels, schools, retail outlets, branch offices and public venues.

ZoneFlex™ 7372

DUAL-BAND 802.11N SMART WI-FI ACCESS POINTS

Patented BeamFlex™ Technology Extends Signal Range, Improves Stability of Client Connections

All ZoneFlex 7372 Smart Wi-Fi access points integrate a software-controlled smart antenna array that delivers up to an additional 4 dB of BeamFlex gain and 10 dB of interference mitigation. This allows up to a 2x improvement in signal range and a reduction in packet loss from the ability to automatically mitigate interference and avoid obstacles.

Advanced WLAN Applications with Smart/OS

When used with the Ruckus ZoneDirector Smart WLAN controller, each ZoneFlex 7372 supports a wide range of value-added applications such as guest networking, Smart Wireless Meshing, Dynamic PSK, hotspot authentication, wireless intrusion detection and many more. With Smart/OS, WLANs can be created and mapped to the same or different APs or VLANs. In a centrally managed configuration, the ZoneFlex 7372 works with a wide range of authentication servers including Microsoft's Active Directory, LDAP, and RADIUS.



Flexible Deployment Options

ZoneFlex 7372 APs can be deployed as a standalone AP or as part of a centrally managed wireless LAN using ZoneDirector Smart WLAN controllers. ZoneFlex 7372 can be deployed across any L2/L3 network and can bridge traffic onto the local network, tunnel to a central location using L2TP or PPPoE, or route between the WAN and NAT'ed private subnets. It can be wired to the network or connect wirelessly by meshing to another AP when Ethernet cabling is unavailable. When used with the ZoneDirector, each ZoneFlex 7372 is automatically configured through the network making deployment quick and easy.

Complete Local and Remote Management

Each ZoneFlex 7372 can be managed as a standalone AP through a Web-based GUI, using SNMP or through the Ruckus FlexMaster Wi-Fi remote management system. Local management can also be performed using the ZoneDirector Smart WLAN controller. FlexMaster is a LINUX-based software platform that uses industry-standard protocols to perform bulk configuration, fault detection, monitoring and a wide range of troubleshooting capabilities over a wire area connection. The ZoneDirector enables local management and control of APs, adding value-added services such as transmit power control, guest networking and meshing.




FEATURES

- Dual-band concurrent (5GHz/2.4GHz)
- Adaptive antenna technology and advanced RF management
- Up to an additional 4dB BeamFlex gain / 10dB interference mitigation / 3 dBi physical antenna gain
- Automatic interference mitigation, optimized for high-density environments
- Integrated smart antenna technology
- Standard 802.3af Power over Ethernet (PoE)
- Router mode with NAT and DHCP services
- Up to 2 times extended range and coverage
- IP multicast video streaming support
- Up to 27 BSSIDs per radio with unique QoS and security policies
- Advanced QoS packet classification and automatic priority for latency-sensitive traffic
- Dynamic, pre-user rate-limiting for hotspot WLANs
- WPA-PSK (AES), 802.1X support for RADIUS and Active Directory**
- Ethernet 802.1x port-based authentication (authenticator and supplicant)
- Smart Mesh Networking**
- BYOD, Zero-IT and Dynamic PSK**
- Admission control/load balancing**
- Band steering and airtime fairness
- Captive portal and guest accounts **
- Application recognition and control**
- SecureHotspot**
- SPOT location services**
- Band balancing**
- Wall, desktop or ceiling mountable
- Limited lifetime warranty

** when used with Ruckus ZoneDirector controller

Many potential antenna combinations can be chosen for high availability of Wi-Fi

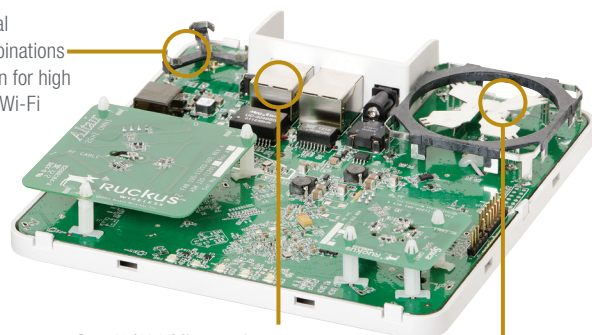

One 10/100 Mbps and one 802.3af PoE 10/100/1000 Mbps Ethernet port support


High-gain directional antenna elements not only delivers signal gain but also interference mitigation for range extension, reliability and high data rates

ZoneFlex™ 7372

DUAL-BAND 802.11N SMART WI-FI ACCESS POINTS


AFFORDABLE PERFORMANCE FOR ENTERPRISES

The ZoneFlex 7372 integrates seamlessly with your existing network infrastructure, delivering best-in-class 802.11n performance and reliability at the industry's most affordable price — making it the ideal wireless solution for mid-range enterprise and branch office applications.

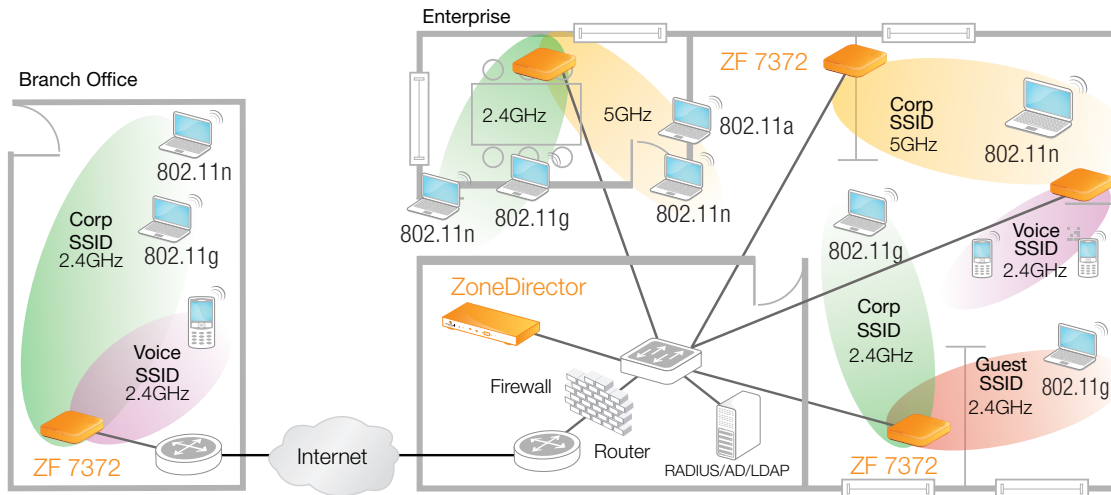

IN-ROOM DEPLOYMENT FOR HOTELS

The ZoneFlex 7372 is ideal for deployment in hotel guest rooms to provide wireless connection to high quality video and data access, as well as wired connections to IP phone and guest devices.

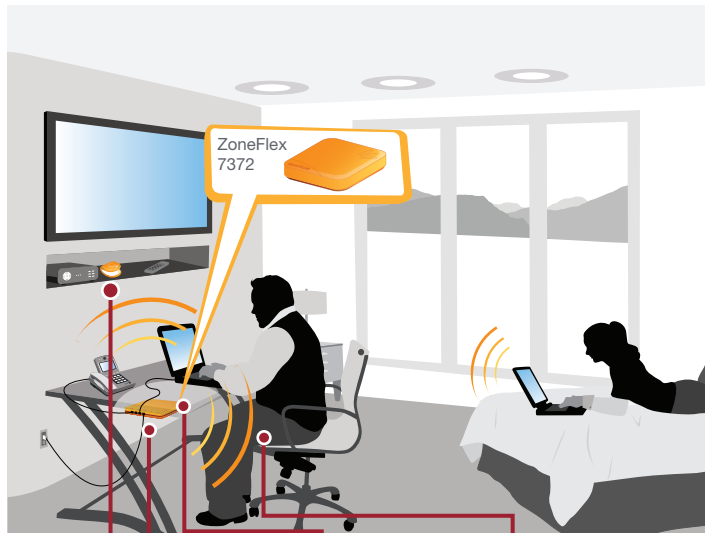

Dual-band (2.4/5GHz) support allows for concurrent Internet and IP-based video services

Sleek, elegant design easily concealed

Multiple SSIDs for high-speed Internet access and other services

Wired ports for connecting IP devices such as laptops and VoIP phones

DEPLOYMENT FOR RETAIL / BRANCH OFFICES

The ZoneFlex 7372 is ideal for deployment in retail stores to provide inconspicuous wireless connection to high quality video, wireless IP phones and data access for handheld PoS bar code scanners.



Wired ports to connect devices such as cash registers, printers, etc.

Multiple SSIDs for differentiated user services (e.g., guest Wi-Fi, point of sale, voice)

5GHz band and smart antenna system ideal for wireless meshing between APs

Reliable Wi-Fi connectivity for point of sale devices

Specifications

PHYSICAL CHARACTERISTICS	
POWER	<ul style="list-style-type: none"> DC Input: 12 VDC 1.0A Power over Ethernet 802.3 af
PHYSICAL SIZE	<ul style="list-style-type: none"> 15.8 cm x 15.8 cm x 4 cm (6.2 in x 6.2 in x 1.57 in)
WEIGHT	<ul style="list-style-type: none"> 350 g (0.77 lb.)
ETHERNET PORTS	<ul style="list-style-type: none"> 1 auto MDX, auto-sensing 10/100/1000 Mbps, RJ-45, POE port 1 auto MDX, auto-sensing 10/100 Mbps, RJ-45 ports
LOCK OPTIONS	<ul style="list-style-type: none"> Hidden latching mechanism Kensington Lock Hole T-bar Torx Bracket (902-0108-0000) Torx screw & padlock
ENVIRONMENTAL CONDITIONS	<ul style="list-style-type: none"> Operating Temperature: 0°C - 50°C Operating Humidity: 10% - 95% non-condensing
POWER DRAW	<ul style="list-style-type: none"> DC Input <ul style="list-style-type: none"> Idle: 1.5W Typical: 3.5W Peak: 8W Power over Ethernet Input <ul style="list-style-type: none"> Idle: 1.5W Typical: 3.5W Peak: 8W

PERFORMANCE AND CAPACITY	
UDP THROUGHPUT	<ul style="list-style-type: none"> 225 Mbps (HT40) / 120Mbps (HT20)
CONCURRENT STATIONS	<ul style="list-style-type: none"> Up to 500 clients per AP
SIMULTANEOUS VoIP CLIENTS	<ul style="list-style-type: none"> Up to 30

RF	
ANTENNA	<ul style="list-style-type: none"> Adaptive antenna that provides up to 128 unique antenna patterns Full omnidirectional polarization diversity
PHYSICAL ANTENNA GAIN	<ul style="list-style-type: none"> Up to 3 dBi (2.4 and 5 GHz)
BEAMFLEX* SINR TX GAIN	<ul style="list-style-type: none"> Up to 4 dB
BEAMFLEX* SINR RX GAIN	<ul style="list-style-type: none"> Up to 4 dB (PD-MRC)
INTERFERENCE MITIGATION	<ul style="list-style-type: none"> Up to 10 dB
MINIMUM RX SENSITIVITY	<ul style="list-style-type: none"> Up to -101 dBm

*BeamFlex gains are statistical system level effects translated to enhanced SINR based on observations over time in real-world conditions with multiple APs and many clients

MANAGEMENT	
DEPLOYMENT OPTIONS	<ul style="list-style-type: none"> Standalone (individually managed) Managed by ZoneDirector Managed by FlexMaster Managed by SmartCell™ Gateway 200
CONFIGURATION	<ul style="list-style-type: none"> Web User Interface (HTTP/S) CLI (Telnet/SSH), SNMP v1, 2, 3 TR-069 vis FlexMaster
AUTO AP SOFTWARE UPDATES	<ul style="list-style-type: none"> FTP or TFTP, remote auto available

WI-FI	
STANDARDS	<ul style="list-style-type: none"> IEEE 802.11a/b/g/n
SUPPORTED DATA RATES	<ul style="list-style-type: none"> 802.11n: 6.5Mbps – 130Mbps (20MHz) 6.5Mbps – 300Mbps (40MHz) 802.11a: 54, 48, 36, 24, 18, 12, 9 and 6Mbps 802.11b: 11, 5.5, 2 and 1 Mbps 802.11g: 54, 48, 36, 24, 18, 12, 9 and 6 Mbps
RADIO CHAINS	<ul style="list-style-type: none"> 2 x 2
SPATIAL STREAMS	<ul style="list-style-type: none"> 2
RF POWER OUTPUT (Aggregated)	<ul style="list-style-type: none"> 26 dBm for 2.4GHz† 24 dBm for 5GHz†
CHANNELIZATION	<ul style="list-style-type: none"> 20MHz and/or 40MHz
FREQUENCY BAND	<ul style="list-style-type: none"> IEEE 802.11 b/g/n: 2.4 – 2.484 GHz I IEEE 802.11a/n: 5.15 – 5.25 GHz; 5.25 – 5.35 GHz; 5.47 – 5.725 GHz; 5.725 – 5.85 GHz
OPERATING CHANNELS	<ul style="list-style-type: none"> US/Canada: 1-11, Europe (ETSI X30): 1-13, Japan X41: 1-13 5 GHz channels: Country dependent
BSSID	<ul style="list-style-type: none"> Up to 27 per radio
POWER SAVE	<ul style="list-style-type: none"> Supported
WIRELESS SECURITY	<ul style="list-style-type: none"> WPA-PSK, WPA-TKIP, WPA2 AES, 802.11i Authentication via 802.1X with the ZoneDirector, local authentication database, support for RADIUS, LDAP, and ActiveDirectory
CERTIFICATIONS*	<ul style="list-style-type: none"> U.S., Europe, Australia, Brazil, Canada, Chile, China, Colombia, Costa Rica, Hong Kong, India, Indonesia, Israel, Japan, Korea, Malaysia, Mexico, New Zealand, Peru, Philippines, Saudi Arabia, Singapore, South Africa, Taiwan, Thailand, UAE, Vietnam WEEE/RoHS compliance EN-60601-1-2 (Medical) Wi-Fi Alliance WFA Passpoint Release 2 EN50121-1 Railway EMC EN50121-4 Railway Immunity IEC 61373 Railway Shock & Vibration

† Maximum power varies by country

*See price list for latest country certification listing

Product Ordering Information

MODEL	DESCRIPTION
ZoneFlex 7372 Smart Wi-Fi 802.11n Access Point	
901-7372-XX00	Concurrent dual band 802.11n AP, no power adapter
901-7372-XX50	7372-E, Concurrent dual band 802.11n AP, no power adapter
Optional Accessories	
902-0108-0000	Spare, Accessory Mounting Bracket
902-0173-XXYY	Power Adapter, AC/DC wall plug,100-240Vac 50/60Hz
902-0162-XXYY	PoE injector (sold in quantities of 10 or 100)
911-0303-VP02	Dual band indoor antenna pair, 3 dBi omnidirectional
911-0505-DP-01	Dual band cross polarized indoor antenna, 5 dBi sector

PLEASE NOTE: When ordering ZoneFlex Indoor APs, you must specify the destination region by indicating -US, -IL, or -WW instead of XX. When ordering PoE injectors or power supplies, you must specify the destination region by indicating -US, -EU, -AU, -BR, -CN, -IN, -JP, -KR, -SA, -UK, or -UN instead of -XX.

